

Adsorption Efficiency of Activated Carbon Produced from Corn Cob for the Removal of Cadmium Ions from Aqueous Solution

Ezeh Ernest^{1*}, Okeke Onyeka², Aburu C.M³, Aniobi C.C⁴, Ndubuisi J.O⁵

¹Chemical Engineering Department, Nnamdi Azikiwe University, Awka.

²Plastic Production Unit, Scientific Equipment Development Institute, Enugu.

³Machine Shop Unit, Scientific Equipment Development Institute, Enugu.

⁴Dept. of Community Medicine, University of Nigeria, Enugu Campus, Enugu.

⁵Applied Science Dept., Federal College of Dental Technology and Therapy, Enugu

***Corresponding Author:** Ezeh Ernest, Chemical Engineering Department, Nnamdi Azikiwe University, Awka.

Abstract: Studies were carried out to evaluate the adsorption efficiency of activated carbon produced from corn cob for the removal of Cd II ions from aqueous solution. The studies were carried out with due consideration of standard analytical procedures and instrumentation. Increase in the Cd II ions concentration from 90 to 180mg/l decreased the adsorption capacity of the adsorbent from 89.273 to 65.770%.

Increase in the adsorbent's dosage from 0.5 to 2.0g increased the adsorption of Cd II ions from 81.522 to 91.980%. At pH of 5.0, the adsorption process attained equilibrium with a peak adsorption of Cd II ion at 93.628%. At a contact of time of 30mins between the adsorbate (Cd II ions) at the adsorbent; the adsorption of Cd II ions reached a peak value of 92.410%. The adsorption of Cd II ions on the surface of the activated carbon increased from 90.436 to 93.210% with increase in temperature from 40o to 160oC. The decrease in Gibb's free energy of adsorption of Cd II ions on the surface of the activated carbon revealed that the adsorption was favourable at high temperatures. The positive values of ΔH and ΔS shows that the adsorption process was endothermic.

Keywords: Corn cobs, Adsorption efficiency, Aqueous solution, Cadmium ion, and Activated carbon.

1. INTRODUCTION

Water pollution by heavy metals is considered a serious environmental problem due to their toxicity, long persistence, bioaccumulation and biomagnifications in the food chain [1]. Nowadays water pollution by heavy metals is fast growing due to natural processes and increasing human activities which include mining, agriculture and manufacturing industries. Heavy metals are toxic pollutants released into the surface and ground water bodies as a result of different activities [2]. Heavy metals are non-biodegradable and cannot be detoxified biologically [3]. Environmental pollution by heavy metals is a serious and complex problem that all the time occupies worldwide attention.

Industrial and municipal waste water frequently contains metal ions that can be harmful to aquatic life and human health.

Waste waters containing metal ions such as cadmium, zinc and lead are introduced into water bodies commonly because these metals are widely used and exposure of human beings to these toxic metals even at very low concentrations could results to severe symptoms [1].

Such symptoms include memory loss, increased allergic reactions, high blood pressure, depression, irritability, poor concentration, sleep disabilities, speech disorders, cholesterol, vascular occlusion, neuropathy, autoimmune diseases and chronic fatigue. The effects of acute cadmium poisoning in humans are high blood pressure, kidney damage and destruction of testicular tissue and red blood cells. The treatment methods for metal bearing effluents commonly include chemical precipitation, membrane filtration, electrolytic reduction, solvent extraction, ion exchange and adsorption [4]. Among these treatments, adsorption is considered to be an effective and economical method that has attracted considerable interest.

Adsorption with selection of suitable adsorbent can be an effective and versatile method and can be easily adopted in low cost to remove heavy metals from large amount of industrial waste waters. Activated carbons are adsorbents that are used industrially in multiple processes for product separation and purification and for the treatment of liquid and gaseous effluents [5].

Considering, however the high cost of activated carbon and the tedious procedures for its preparation and regeneration, there is a continuing search for low-cost potential adsorbents. The search for low cost and easily available adsorbents has led to the investigation of materials of agricultural and biological origin, alongside those of industrial by-products as adsorbents for removal of heavy-metals [2].

Ligno-cellulosic materials and wastes such as pea nut skin, cotton, onion skin, rice hull, maize stalks, bark, jute fibres, bagasse, rice straw, corn cobs and palm kernel husks have received much attention in the area of heavy metal ion removal [6]. Various functional groups such as carboxylates, phenolic and aliphatic hydroxyls and carbonyl groups in these materials have the ability to adsorb metal ions. Adsorption of heavy metals on the surface of activated carbon materials is one of the most popular methods of removal of metal ions from aqueous solutions. Adsorption is a surface phenomenon in which molecules of the adsorbate (metal ions) are attracted and held to the surface of an adsorbent (activated carbon) until an equilibrium is attained between adsorbed molecules and those still freely distributed in the carrying gas or liquid [7].

Activated carbon is a common term used to describe carbon-based materials which contain well developed internal pore structure. The microspores of activated carbon provide an excellent condition for adsorption to occur, since the adsorbing material can interact with many surfaces simultaneously [8].

In general, there are three main steps in pollutant sorption onto a solid solvent: the transport of pollutant from the bulk solution to the sorbent surface, adsorption on the particle surface and transport within the sorbent particles [9].

Adsorption studies, in particular kinetics and isotherms, provide information on the mechanism of sorption: that is how the pollutant bounds within the sorbent. The application of corn cob as a biosorbent material present showing potential due to its main components of cellulose, pectin, hemicelluloses and lignin which contain functional groups as binding sites for metals [10].

Therefore, studies were conducted to evaluate the adsorption efficiency of activated carbon produced from corn cob for the removal of cadmium ions aqueous solution.

2. MATERIALS AND METHODS

2.1. Preparation of the Biomass

The corn cob samples were collected from farms and markets within Enugu metropolis, Enugu, Nigeria. This material is a zero value agricultural waste product. It was washed thoroughly with water and sun dried for 5 days. The dried biomass was milled and sieved using 100-300 μ m analytical sieves. The sieved materials were subsequently washed with 0.01M HCl in order to remove any interfering substances that might be in the biomass.

2.2. Preparation of Activated Carbon

The activated carbon was prepared according to the reported procedures of [11, 12].

The corn cob powder (200g) was weighed into a clean dry beaker containing 200ml of 95% H₂SO₄ for about 24hrs and was followed by refluxing in a fume hood for 4hrs.

After cooling, the reaction mixture was filtered with distilled water and soaked in 1% NaHCO₃ solution to neutralize any remaining acid. The sample was then washed with distilled water until a neutral pH between 6 and 7 was obtained. The sample were then dried overnight in an oven at 150 $^{\circ}$ C and kept in a glass bottle until use.

2.3. Adsorbate

A stock solution of 1000mg/l Cd II ions was prepared by dissolving CdCl₂ (Merck, South Africa) in ultra-pure water (resistivity > 18M Ω Cm⁻¹) and acidified with 5ml of concentrated HNO₃ to prevent hydrolysis.

Progressive dilution procedure of the stock solution was employed in the preparation of the working solutions. The pH of the working solutions was adjusted to required values with 0.1M NaOH or 0.1M HCl. All the chemicals used were of analytical reagent grade.

2.4. Batch Adsorption Studies

A weighed amount of activated carbon was introduced into the stoppered reagent bottles of various concentrations with 100ml aqueous solutions of Cd II ions. The suspensions were shaken at room temperature using a mechanical shaker for a prescribed time at 160rpm. The solutions were filtered using whatmann 42 filter paper and the residual concentrations of metal ion determined by flame atomic absorption spectrophotometer at 210nm.

The effects of concentration (90-180mg/l), adsorption dose (0.5 – 2.0g), solution pH (2.5 – 9.0) contact time (10 – 40min) and temperature (40 – 160°C) were studied.

Blank solutions were treated similarly and the recorded concentration at the end of each procedure was taken as the initial one.

The percentage of removed Cd II ions (R%) in solution was calculated using;

$$R\% = \frac{C_o - C_e}{C_o} \times \frac{100}{1} \quad (1)$$

Where C_o is the initial concentration of the metal ion while C_e is the equilibrium concentration of the metal ion.

Calculation of thermodynamic parameters

The values of ΔH and ΔS were calculated from the slope and intercept of the linear Van't Hoff plot respectively, using the relation;

$$Kd = \frac{C_o - C_e}{C_o} \times \frac{V}{M} \text{ (mg/l)}. \quad (2)$$

Where ΔS = entropy change for the process,

ΔH = enthalpy change for the process,

R = gas constant and T = absolute temperature.

The distribution coefficient (Kd) on the activated carbon surface were calculated using the equation;

$$Kd = \frac{C_o - C_e}{C_o} \times \frac{V}{M} \text{ (mg/l)}. \quad (3)$$

The changes in free energy (ΔG) for the specific adsorption were calculated using the equation;

$$\Delta G = - RT \ln Kd \quad (4)$$

Where the symbols have their usual significance.

3. RESULTS AND DISCUSSION

3.1. Effect of Concentration

Table 1 shows that as the concentration of the adsorbate (Cd II ions) were increased from 90 to 180mg/l, the adsorption efficiency of the adsorbent decreased from 89.27 to 65.77%.

Table1. Percentage adsorption efficiency of 2g of adsorbent at varying concentrations of the adsorbate.

Concentration (mg/l)	C_o	C_e	$R\% = \frac{C_o - C_e}{C_o} \times \frac{100}{1}$
90	88.105	9.450	89.270
120	30.916	7.204	76.701
150	8.412	2.483	70.484
180	2.682	0.918	65.773

This observed behaviour can be attributed to the increase in the amount of Cd II ions to the unchanging number of available active sites in the adsorbent.

Fig I shows a graphical decline in the percentage adsorption efficiency of the adsorbent as the concentration of the Cd II ions were increased

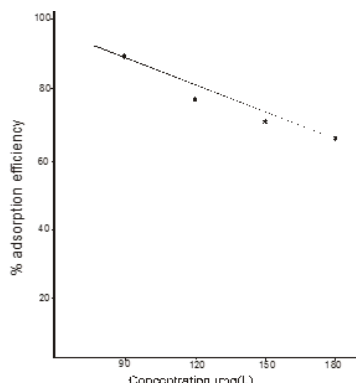


Fig1. A graphical representation of adsorption efficiency of activated carbon at varying concentrations of the adsorbate.

The findings of this study agreed with the report made by [13] who observed a decrease in adsorption efficiency of activated carbon from 70% to 52% for Pb II ions in aqueous solution. The study implies that the adsorption efficiency of Cd II ions by the activated carbon is concentration dependent.

3.2. Effect of Dosage

Table 2 shows that as the adsorbent dosage were increased from 0.5 to 2.0g in the aqueous solution, the adsorption efficiency or removal efficiency of the adsorbent was found to increase from 81.52 to 91.98%. Therefore, increase in the adsorbent’s dosage significantly increased the removal of Cd II ions in the aqueous solution.

Table2. Percentage adsorption efficiency of activated carbon at different dosages

Dosage (g)	Co (mg/l)	Ce (mg/l)	$R\% = \frac{C_o - C_e}{C_o} \times \frac{100}{1}$
0.5	88.105	16.280	81.522
1.0	88.105	12.842	88.424
1.5	88.105	10.393	88.204
2.0	88.105	7.069	91.980

Fig.2 shows an increase in the percentage removal of Cd II ions in the aqueous solution as the adsorbent dosage was increased

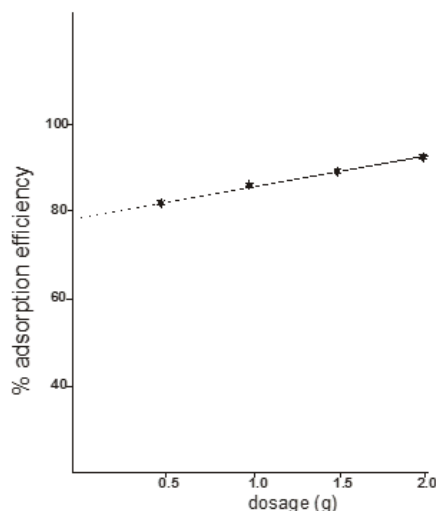


Fig2. A graphical representation of adsorption efficiency of activated carbon at varying adsorbent dosages

This phenomenon can be attributed to the greater availability of active sites or surface area, thus enabling faster and easier penetration of the heavy metal onto the adsorption sites of the adsorbent.

The result of this study compares favourably with the findings of [14] in which they reported that higher dosage of adsorbent in aqueous metallic solutions increases adsorption due to more surface areas and functional groups being available on the adsorbent.

[15] observed an increase in removal efficiency of activated carbon for heavy metal (Ni II ion) in aqueous solution from 40 to 80% and this agreed with what was reported in this study.

3.3. Effect of pH

The pH is one of the most imperative factors governing the adsorption of metal ions in aqueous solutions which affects the functional groups protonation and also metal ion adsorption by the adsorbents.

Table3. Percentage adsorption efficiency of activated carbon at varying pH.

pH (g)	Co	Ce	$R\% = \frac{C_o - C_e}{C_o} \times \frac{100}{1}$
2.5	88.105	6.716	92.377
5.0	88.105	5.814	93.628
7.5	88.105	7.193	91.840
9.0	88.105	7.022	92.030

The effect of pH in an aqueous solution for the adsorption of metal ions is a major factor used in determining the adsorption property of an adsorbent in aqueous solution.

Table 3 shows that as the aqueous solution was made less acidic from 2.5 to 5.0 the adsorption efficiency increased from 92.377 to 93.628%. At pH of 5.0, the adsorbent adsorbed Cd II ions to the highest value and was equally the equilibrium pH for the maximum Cd II ions adsorption by the adsorbent.

The adsorption efficiency of Cd II ion by the activated carbon was lowest at aqueous solution pH of 7.5 which could be due to the electrostatic repulsion forces between the positively charged H3O+ and Cd2+ ions.

In comparison, the percentage removal of Cd II ions decreases in the alkali medium perhaps due to the formation of Cd (OH)2 and soluble hydroxyl complexes CdOH+ and Cd (OH)3- which could deteriorates the adsorption efficiency of the adsorbent.

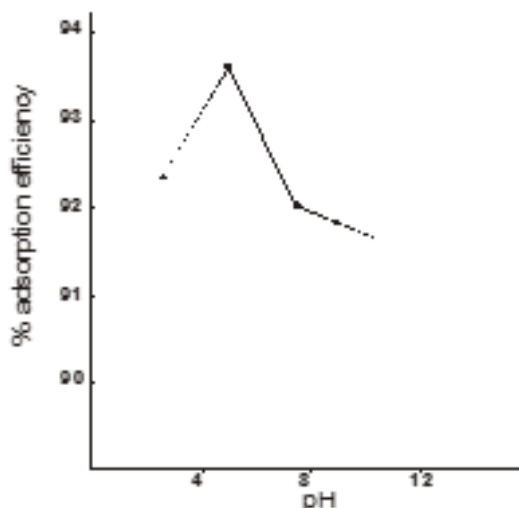


Fig3. A graphical representation of adsorption efficiency of activated carbon at varying pH.

The results of this study on the effect of pH on the adsorption efficiency of activated carbon agreed with the findings of [2] who reported an increase in adsorption efficiency of activated carbon for Pb II ions in aqueous solution as it was made less acidic.

3.4. Effect of Contact Time

Table4. Percentage adsorption efficiency of activated carbon at varying contact time.

Time (min)	Co	Ce	$R\% = \frac{C_o - C_e}{C_o} \times \frac{100}{1}$
10	88.105	11.704	86.715
20	88.105	9.062	89.532
30	88.105	6.864	92.410
40	88.105	7.949	90.981

Table 4 shows that by varying the contact time of the adsorbent and the adsorbate in the aqueous solution from 10 to 30 minutes, the percentage adsorption of Cd II ions by the adsorbent increased from 86.715 to 92.410% while at 40minutes contact time, there was a decrease in the adsorption efficiency to 90.981%.

The table further shows that the adsorption capacity of the adsorbent reached equilibrium at a contact time of 30 minutes during which adsorption efficiency peaked at 92.410% after which a decline in adsorption of Cd II ion was observed (Fig. 4).

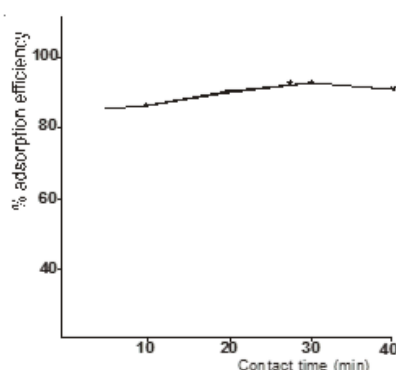


Fig4. A graphical representation of adsorption efficiency of activated carbon at varying contact time.

The presence of adequate external surface area on the activated carbon may have boosted the rate of adsorption in the initial stages (10 to 30 minutes), which was followed by slower internal diffusion process as shown in Fig. 4.

Table5. Kinetic of adsorption at varying contact time.

Time (min)	Co	Ce	Ln Co/Ce
10	88.105	11.704	2.019
20	88.105	9.062	2.275
30	88.105	6.864	2.550
40	88.105	7.999	2.403

The reaction kinetics of adsorption of Cd II ions on the surface of the activated carbon at varying contact time was of the first order following a plot of LnCo/Ce against contact time as shown in Fig 5

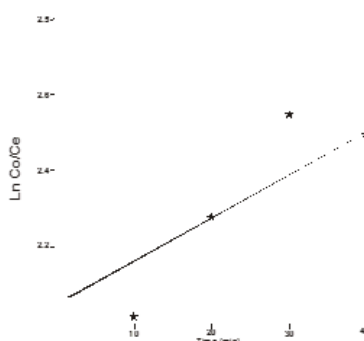


Fig5. A graphical representation of the kinetics of adsorption of Cd II ions by the activated carbon at varying contact one.

The plot shows a straight-line graph confirming that the adsorption kinetic of the Cd II ions on the surface of the activated carbon at varying contact time was of the first order.

Therefore, the study of adsorption kinetics describes the solute uptake and evidently this rate control the residence time of adsorbate intake at the solid solution interface.

3.5. Effect of Temperature

Table6. Percentage adsorption efficiency of activated carbon at varying temperature.

Temp °C	C _o	C _e	$R\% = \frac{C_o - C_e}{C_o} \times \frac{100}{1}$
20	88.105	8.426	90.436
40	88.105	7.102	91.940
60	88.105	6.422	92.711
80	88.105	8.986	93.210

Table 6 shows that increase in temperature of the reaction from 40 to 160°C increased the adsorption efficiency of activated carbon for Cd II ions in the aqueous solution from 90.436 to 93.210%.

The extent of adsorption of Cd II ions by the activated carbon at various temperature have been shown in Fig. 6.

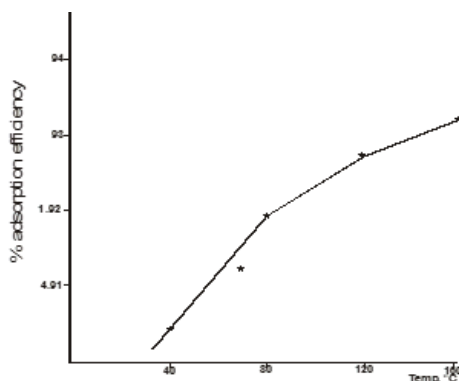


Fig6. A graphical representation of adsorption efficiency of activated carbon at varying temperature

This result shows that as the temperature of the reaction was increased the adsorption efficiency of the adsorbent for the adsorbate in the aqueous solution increased possibly due to increased mobility and diffusion of the ionic species.

Since diffusion is an endothermic process, it would be expected that an increase in solution temperature would result to the enlargement of pore size due to activated diffusion causing the microspores to widen and deepen and create more surfaces for adsorption.

Table7. Adsorption studies of Cd II ions on the surface of activated carbon as a function of temperature.

T°K	$\frac{1}{T} \times 10^{-3} (K^{-1})$	K _d	LnK _d	ΔH (kJmol ⁻¹)	ΔS jmol ⁻¹	ΔG(kJmol ⁻¹)
313	3.195	45.218	3.8110			-9.917
353	2.833	46.101	3.8310			-11.243
393	2.544	46.850	3.850	4.755	81.67	-12.579
433	2.309	47.221	3.864			-13.910

Table 7 shows that the decrease in the ΔG values from -9.917 to -13.910 kJmol⁻¹ with increase in temperature from 313 to 433k reveals that adsorption of Cd II ions on the surface of the adsorbent was favourable at higher temperatures.

Hence, the negative values of Gibb's free energy of adsorption of Cd II ions indicate that the whole process was spontaneous and therefore increases the affinity of Cd II ions on the adsorbent. A plot of lnK_d against 1/T gave a straight line and evaluation of ΔS from the plot gave a value of 132.96 jmol⁻¹

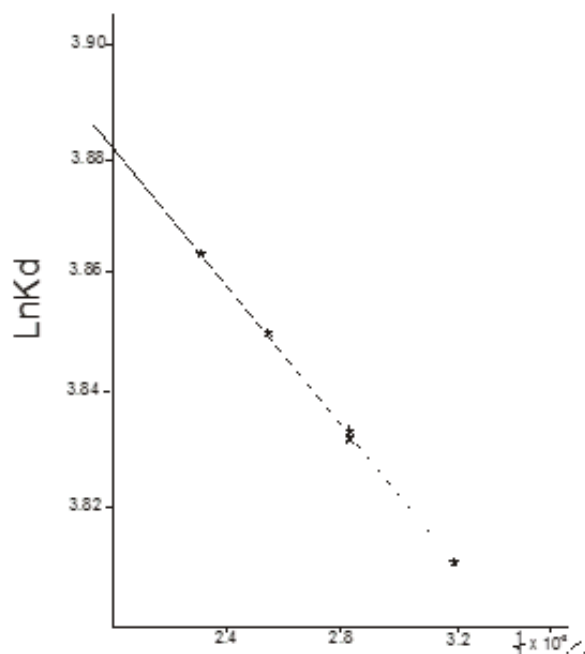


Fig7. A graphical representation of adsorption of Cd II ions as a function of temperature

The positive values of ΔS reveals an increase in randomness at the solid solution interface during the fixation of Cd II ions on the active sites of the adsorbent.

The enthalpy of adsorption of Cd II ions estimated from the plot was 14.67 kJmol^{-1}

The positive value of the ΔH therefore shows that the adsorption of Cd II ions on the surface of the activated carbon was an endothermic process.

4. CONCLUSION

The result of this study clearly demonstrates the potential of using activated carbon from corn cob in the adsorption of heavy metals (Cd II ions) from aqueous solution. Since the removal of heavy metals from waste water or aqueous solution is normally a costly venture for any corporate or private entity, the use of lignocellulosic materials such as corn cob, which are wastes in the environment, in the production of activated carbon for the adsorption of organic and inorganic pollutants in aqueous solutions should be supported and given every attention by concerned stakeholders. The study shows that effective adsorption of Cd II ions on the surface of activated carbon is time, temperature, dosage, concentration and pH dependent.

REFERENCES

- [1] Wodjanarovits L., Foldvary C.M. and Takacs E. (2010). Radiation induced graphing of cellulose for adsorption of hazardous water pollutants: A fadiation physics and chemistry, 79(8); 848-262.
- [2] Mengistie A.A., Siva Reo T., Piasado Rao A.V and Singanan M. (2008). Removal of lead II ions from aqueous solution using activated carbon from militia femiginea plant leaves. Bull. Clen. SOC. Ethiopia 22(3): 349-360.
- [3] Kumar P.S. (2013). Adsorption of Lead II ions from simulated waste water using natural waste: a kinetic, thermodynamic and equilibrium study. Environmental progress and sustainable energy, 174-181.
- [4] Davila-Jimenez M.M., Elizade-Gonzalez M.P, Geyer W., Mattusch J. and Wennrich R. (2003). Adsorption of metal cations from aqueous solution onto a national and a model bio composite. Colloids surf physico-chem Eng. Aspects, 219:243-289.
- [5] Manoocheberi M., Korsand A. and Hasheni G. (2012). Role of modified activated carbon by H_3PO_4 or K_2CO_3 from natural adsorbent for the removal of Pb II from aqueous solutions. Carbon letters, 13(2); 115-120.
- [6] Aharoni C. and Spark D.L (1991). Kinetics of soil chemical reactions – theoretical treatment, Sverez D.L. Rates of soil chemical processes, soil science of America, Madison, 161: 753: - 761.
- [7] Radenovia A., Malina J. and Strkaly A. (2011) . Removal Ni II from aqueous solution by low cost adsorbent; The Holistic Approach to environment, 13:109-120.

- [8] Cecen F. and Aktas O. (2011). Activated carbon for water and waste water treatment, integration adsorption and biological treatment, wiley – VCH publishers, weinheim, 379-394.
- [9] Crini G. (2003). Recent developments in polysaccharide based materials used as adsorbents in waste water treatment. *Polymer science*, 30: 38-70.
- [10] Kaushik C.P. Tuteja R., Kaoshik K. And Sharma J.K. (2009). Minimization of organic chemical load in direct dyes effluent using low cost adsorbents *chemical Engineering Journal*, 133:234-240
- [11] El-Nemr A., Sikaily A.E., Khaled A. and Abdelwahab O. (2007). Removal of toxic chromium VI from aqueous solution by activated carbon using *Casuarina equisetifolia*. *Chemistry and Ecology*, 23(2): 119-129.
- [12] Esmaili A., Ghasemi S. and Sohrabipour I. (2010). Biosorption of copper from waste water by activated carbon preparation from *alga sargassium sp.* *Natural product research*, 24(4): 341-348.
- [13] Moyo M., Chikazaza L., B. Nyaminda B.C. and Guyo U. (2013). Adsorption batch studies on the removal of Pb II using maize tassel based activated carbon. *International Journal of physical science research*, 17:303-317.
- [14] Esposito A, Ragnanelli F., Lodi A and Veglio F. (2011). Biosorption of heavy metals by *Sphaerotilus natans* an equilibrium study as different pH and biomass concentration. *Journal Hydrometallurgy*, 60(1): 129-141 .
- [15] Ali H.H., Pmal M.A and Hussaini A.M (2017). Removal of some heavy metals from aqueous solution using natural wastes from orange peel activated carbon. *IJRDO Journal of Applied Science*, 3(3): 13-26.

Citation: Ezeh Ernest, et.al, “Adsorption Efficiency of Activated Carbon Produced from Corn Cob for the Removal of Cadmium Ions from Aqueous Solution”. *International Journal of Advanced Research in Chemical Science (IJARCS)*, 6(7), pp. 14-22, DOI: <http://dx.doi.org/10.20431/2349-0403.0607003>

Copyright: © 2019 Authors. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.